

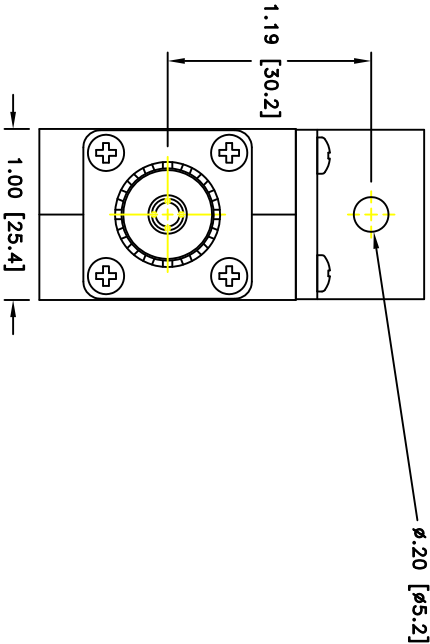
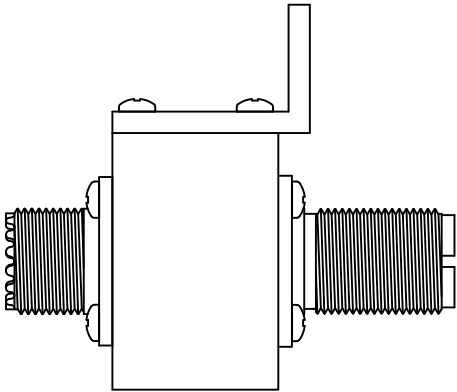


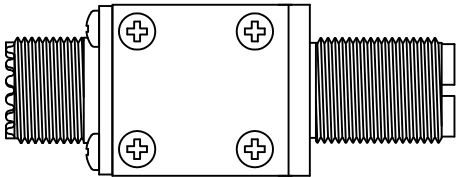

REVISIONS				
REV.	DESCRIPTION	ECN	DATE	APPROVED
F	REFER TO ECN	10493	2/29/12	LC

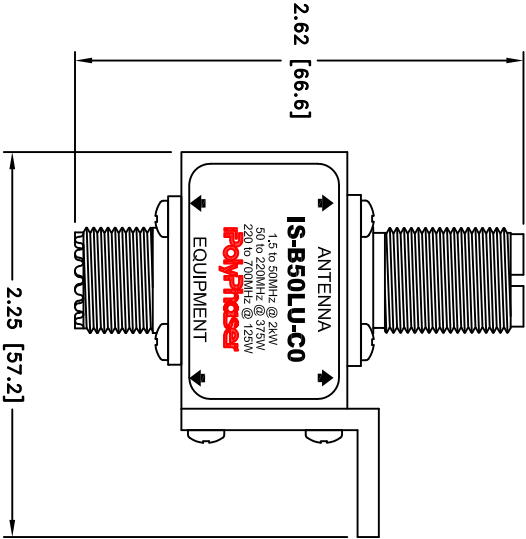

CUSTOMER APPROVAL _____ DATE: _____

ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.

MAXIMUM CHARACTERISTICS
APPLICATION: BULKHEAD MOUNT
FREQUENCY RANGE: 1.5MHZ TO 700MHZ
SURGE: 50KA IEC 61000-4-5 8/20µs WAVEFORM 500J
TURN-ON: ±600Vdc ±20%
VSWR: ≤1.2:1 @ 1.5MHZ TO 700MHZ
INSERTION LOSS: ≤0.1dB OVER FREQUENCY RANGE
MAX POWER: HF 2kW, VHF 375W, UHF 125W
THROUGHPUT ENERGY: ≤10mJ
TEMPERATURE: -45°C TO +85°C STORAGE/OPERATING
VIBRATION: 1G @ 5HZ TO 100HZ
EU RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS		DRAWN S. HALL	DATE 10/5/98
TOLERANCES: FRACTIONS=± ANGLES= 1°		PRODUCT MGR J. VITELLO	11/5/98
XX=±.00 XXX=±.010		11/5/98	
MATERIAL: NOTED		MARKETING APP'D R. MATTHEUS	11/6/98
THIRD-ANGLE PROJECTION 		PROJECT NO.	
NOTICE: THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF POLYPHASER CORPORATION. ALL RIGHTS RESERVED.			
<div></div>			
TITLE IS-B50LU-C0 CUSTOMER PRINT			
SIZE A	CAGE 61114	DOCUMENT NAME IS-B50LU-C0-C	REV F
SCALE= 1:1	PROD CAT RFP	PART NUMBER IS-B50LU-C0	SHEET 1 of 1

PolyPhaser

IS-B50LU-C0
CUSTOMER PRINT

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS, DIVERSION CONTRARY TO U.S. LAW PROHIBITED.