

# SALLINE LOCALIDADE

#### LSXL-ME

#### **Features**

- · Surge current of 18kA
- Max Power 10W
- Frequency range from 1.8 to 6 GHz
- Waterproof IP67 rated
- N Female to N Male connectors

### **Applications**

- · Cellular communication systems
- Public safety systems

- DC Block
- VSWR <1.3:1</li>
- · Low insertion loss
- CE & RoHS compliant
- Directional
- · Emergency response systems
- Industrial

# **Description**

RF surge protector (also known as lightning arrester) LSXL-ME from PolyPhaser utilizing a patented spiral inductor design enables an almost instantaneous response to a lightning surge to protect critical hardware while maintaining the RF performance. This RF surge protector component is manufactured in a coaxial in-line design with wide operating frequency range. All PolyPhaser RF surge protector products are available in stock with same day shipping.

# **Electrical Specifications**

Surge Protector Type DC Handling

Surge Filter DC Block

Description	Minimum	Typical	Maximum	Units
Frequency Range	1.8		6	GHz
Impedance		50		Ohms
Input Power, CW			10	Watts
Surge Current			18	kA
Throughput Energy for 3kA @ 8/20µs wavefor	rm		500	nJ

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: Type N F/M Bulkhead Coaxial RF Surge Protector, 1.8GHz - 6GHz, DC Block, 10W, IP67, .5uJ, 18kA, Filter LSXL-ME





#### LSXL-ME

# **Specifications by Frequency**

Description	F1	F2	F3	F4	F5	Units
Frequency Range	1.8 to 3.8	3.8 to 4.2	4.2 to 6			GHz
VSWR, Typ	1.2:1		1.2:1			
VSWR, Max	1.3:1		1.3:1			
Insertion Loss, Max	0.2		0.2			dB

# **Mechanical Specifications**

Size

 Length
 2.8 in [71.12 mm]

 Width/Diameter
 1.12 in [28.45 mm]

 Weight
 0.4 lbs [181.44 g]

Configuration

Input Connector N Female Output Connector N Male

#### **Environmental Specifications**

**Temperature** 

Operating Range -40 to +85 deg C

Ingress Protection (IP) Rating IP67

Vibration 1G at 5Hz to 100Hz

**Compliance Certifications** 

CE Compliant Yes
Certifications NOM

#### **Plotted and Other Data**

Notes:


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: Type N F/M Bulkhead Coaxial RF Surge Protector, 1.8GHz - 6GHz, DC Block, 10W, IP67, .5uJ, 18kA, Filter LSXL-ME





# **LSXL-ME**

#### **Typical Performance Data**

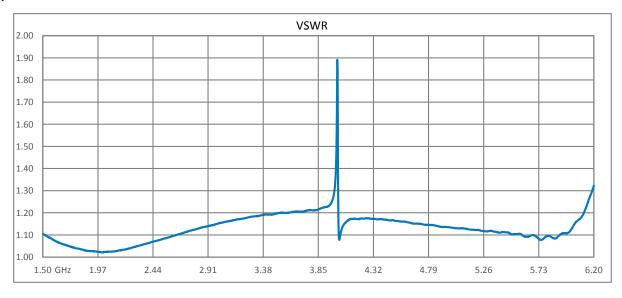

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: Type N F/M Bulkhead Coaxial RF Surge Protector, 1.8GHz - 6GHz, DC Block, 10W, IP67, .5uJ, 18kA, Filter LSXL-ME



# GHz



#### LSXL-ME



PolyPhaser protects and increases the reliability of global RF communications networks, including transportation, telecommunications, defense, security and industrial applications, with superior RF surge protection technologies including DC Block, DC Pass and Ultra Low PIM. Backed by responsive service and expert technical support PolyPhaser continually expands its product offering and services to serve engineers' urgent needs for RF components in mission critical communication networks.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: Type N F/M Bulkhead Coaxial RF Surge Protector, 1.8GHz - 6GHz, DC Block, 10W, IP67, .5uJ, 18kA, Filter LSXL-ME

URL: https://www.polyphaser.com/type-n-surge-protector-6ghz-filter-lsxl-me-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. PolyPhaser reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. PolyPhaser does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and PolyPhaser does not assume any liability arising out of the use of any part or documentation.

# **LSXL-ME CAD Drawing**

